



(ST) S/N:



PIPE EQUIPMENT SPECIALISTS LTD

QUATTRO PIPESTANDS

SAFETY AND OPERATING INSTRUCTIONS



TAG PIPE Ltd's pipe stands are designed to support pipe, tube. Solid bars and/or shapes.

Read and understand these instructions before use.

Contact TAG PIPE Ltd for clarification when in doubt

These instructions should be stored in a dry clean place and be readily available at all time

SAFETY ALWAYS

Before use pipe stands must be checked to ensure they are in a good working order.

Inspect all parts for signs of damage

Make sure the area around the pipe stand is clear of any obstructions

Pipe stands must only be used for the purpose for which they are intended

Pipe stands must only be used on level, solid surfaces

Adjust to the required height before loading the pipe stand

Ensure loads are placed on pipe stands from the vertical position

SAFETY NEVER

Never operate at more than the stated capacity.

Never use other manufactures' parts to repair pipe stands.

Never attempt to support a load or pipe diameter greater than recommended

Never work beneath work pieces supported solely by pipe stands.

Never use on uneven or unstable surfaces

Never modify pipe stands

Never attempt to push or pull loaded pipe stands unless using the correct pipe stands and safety accessories..



OPERATING INSTRUCTIONS

Three leg height adjustable pipe stands for all pipework applications

Select the head to suit application

Position pipe stands 1.5M to 3.5M apart depending upon length and weight of the load

PIPE Ltd manufacture pipe stands that have been designed to give you the highest quality at the best price.


When using Castor wheels Always use Hold down devices HDD400

The Tri-Stands are constructed from box section and are available with a variety of different head styles to suit any application

Adjust the v-head so that 50-75mm of thread is visible

Features and advantages

- 1 1/8" Square box section
- 1,000kg / 2,205lbs load capacity
- Choice of fixed base or fold
- Folding legs allow for easy storage and transportation
- Comprehensive range of head styles
- Adjustable in height from 71cm-122cm
- Independently load tested
- CE rated & certified

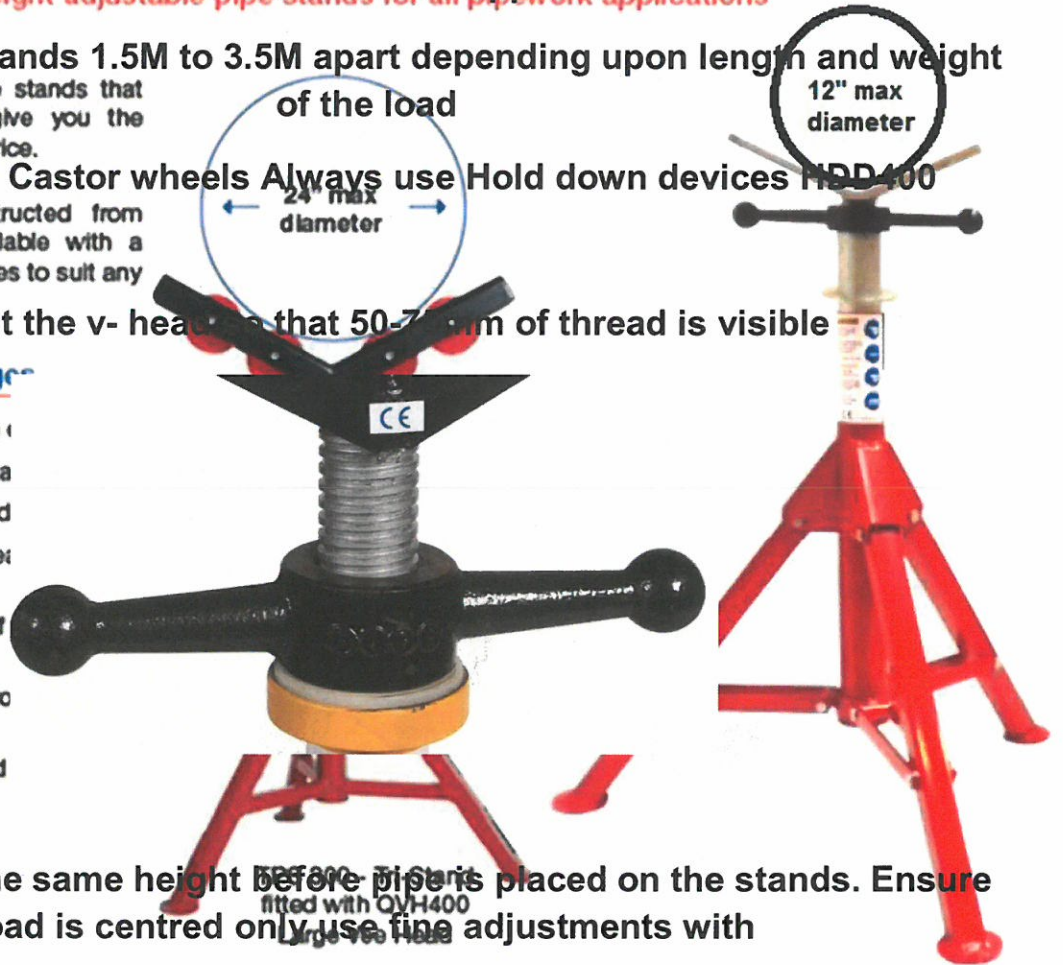

Set stands at the same height before pipes are placed on the stands. Ensure load is centred only use fine adjustments with

