

- Lifting height: 1.5 m
- Possible extension: 6 m

Compact / Lightweight :


- Headroom: 233 mm
- Weight of the device (with 1.5 m lift): 2 kg
- Travel per complete turn of the lever: 72 mm
- Force on the lever at full load: 26 daN/kg

Reliability / Safety :

- As soon as a load greater than 3% of the working load limit is hooked onto the device it is impossible to select neutral position at the brake automatically engages
- Lifting chain galvanised grade 804 X 12 mm
- 360° pivoting hooks with removable safety catches marked with the WLL of the hoist

Note: The 250 kg Bravo hoist cannot be fitted with a load limiter

Spécifications

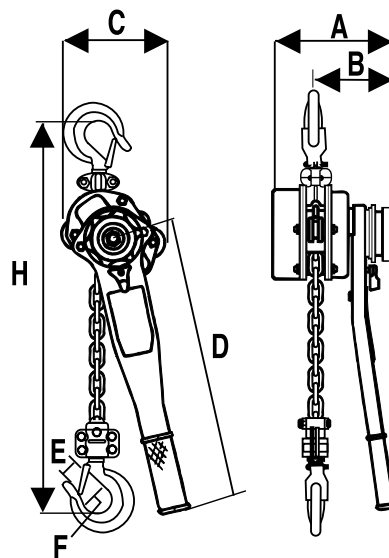

250 kg

WLL kg	Standard height of lift*	Number of falls	Maxi. effort on lever daN/kg	Weight kg	Size of chain** mm	Dimensions (mm)						
						A	B	C	D	E	F	H mini
250	1,5 m	1	26	2	4 x 12	91	70	71	157	21	28	233

* Up to 6 m as an option

** ISO grade 80